

WASHING SOLUTION - LM SERIES

HIGH SPIN WASHING MACHINES LM 8 - 11 KG

IM11 - advanced UX and UI
New IM11 graphic layout for more human-machine interaction.

Smart control
Smart laundry weighing system and customization of the cycle parameters.

Balanced water fill
Hot and cold water mixed during filling phase for energy saving.



360° management
Wi-fi control of the washing cycles through IM11, I'M CONNECT portal and App.

Better ergonomics
Black control panel tilted for better visibility.

AISI 304 stainless steel structure
STAINLESS STEEL front, sides, top, drum, spider and outer drum.



SCAN FOR MORE INFO



Wet Cleaning Ready



SCAN FOR MORE INFO

The images are to be considered purely indicative of the actual product

OPTIONS and ACCESSORIES

- Predisposition for 11 peristaltic pumps for liquid detergent
- Up to 6 x 30 lt/h pumps including flush + lance + tank end signal
- Drain pump kit
- Left-hand door opening
- Hard water inlet
- Second exhaust valve (for recovery circuit)
- Crankcase with or without STAINLESS STEEL cover h200 or h300 mm
- Payment systems for self-service use

TECNICAL DATA

	LM 8	LM 11
- Capacity 1:9 - 1:10	9 - 8 Kg (19.8 - 17.6 lb)	12 - 11 Kg (26.4 - 24.2 lb)
- Drum diameter Ø	535 mm (21 inch.)	535 mm (21 inch.)
- Drum depth	360 mm (14.1 inch.)	470 mm (18.5 inch.)
- Drum volume	81 lt	105 lt
- Load diameter Ø	282 mm (11.1 inch.)	282 mm (11.1 inch.)
- Spin speed	1002 r.p.m.	1002 r.p.m.
- G Factor	300	300
- Air sound intensity	65 dB (A)	65 dB (A)
- Heating leakage	5 %	5 %
- Dynamic load (frequency)	5890 N (16.7 Hz)	5890 N (16.7 Hz)
- Cold water consumption*	50 l (1.7 ft³)	68 l (2.4 ft³)
- Hot water consumption*	14 l (0.5 ft³)	20 l (0.7 ft³)
- Water consumption*	64 l (2.2 ft³)	88 l (3.1 ft³)
- Drain flow	160 lt/min (5.6 ft³/min)	160 lt/min (5.6 ft³/min)
- Machine dimension WxDxH (100 mm = 3.93 inch.)	720x821x1113 mm	720x933x1113 mm
- Net weight	254 Kg (560 lb)	264 Kg (582 lb)
- Packing dimension WxDxH (100 mm = 3.93 inch.)	760x940x1200 mm	760x1045x1200 mm
- Gross weight	267 Kg (588.6 lb)	276 Kg (608.5 lb)
- Packaging volume	0,86 mc (30.4 ft³)	0,95 mc (33.5 ft³)
- STD. packed machines in to 20' container	18 pz.	16 pz.
- STD. packed machines in to 40' container 40' H.C.	37 - 74 pz. sovrapposte	34 - 68 pz. stackable


DATA BY TYPE OF HEATING

- Electrical Heating (electric machines)	6 kW	9 kW
- Consumption* (electric machines)	1,5 kWh	1,5 kWh
- Electric absorption (electric machines) - (50/60Hz)	7,5 kW	10,5 kW
- 3ph400V-480V(+N) / 3ph230V / 1ph230V	11 / 18 / 29 A	16 / 25 / 42 A
- Steam heating consumption* (steam machines)	0,2 Kg (0.4 lb)	0,2 Kg (0.4 lb)
- Electric consumption* (hot-water machines)	0,7 kWh	0,8 kWh
- Electric absorption (hot-water-steam machines)	1,5 kW	1,5 kW
- 3ph400V-480V(+N) / 3ph230V / 1ph230V	- / - / 3 A	- / - / 3 A

* Cycle "Cotton" 60° C - EN60456, tab. A2

- Pos. 1 - Cold water 3/4" - Press. 0,5 ÷ 10 bar
- Pos. 2 - Hot water 3/4" - Press. 0,5 ÷ 10 bar
- Pos. 3 - Steam inlet 3/4" Press. 0,3 ÷ 4,5 bar**
- Pos. 4 - Drain valve Ø 50 mm (2 inch.)
- Pos. 5 - Air vent Ø 50 mm (2 inch.)
- Pos. 6 - Electrical power supply
- Pos. 9 - Detergent load

** 9 bar Options (min 1 bar)

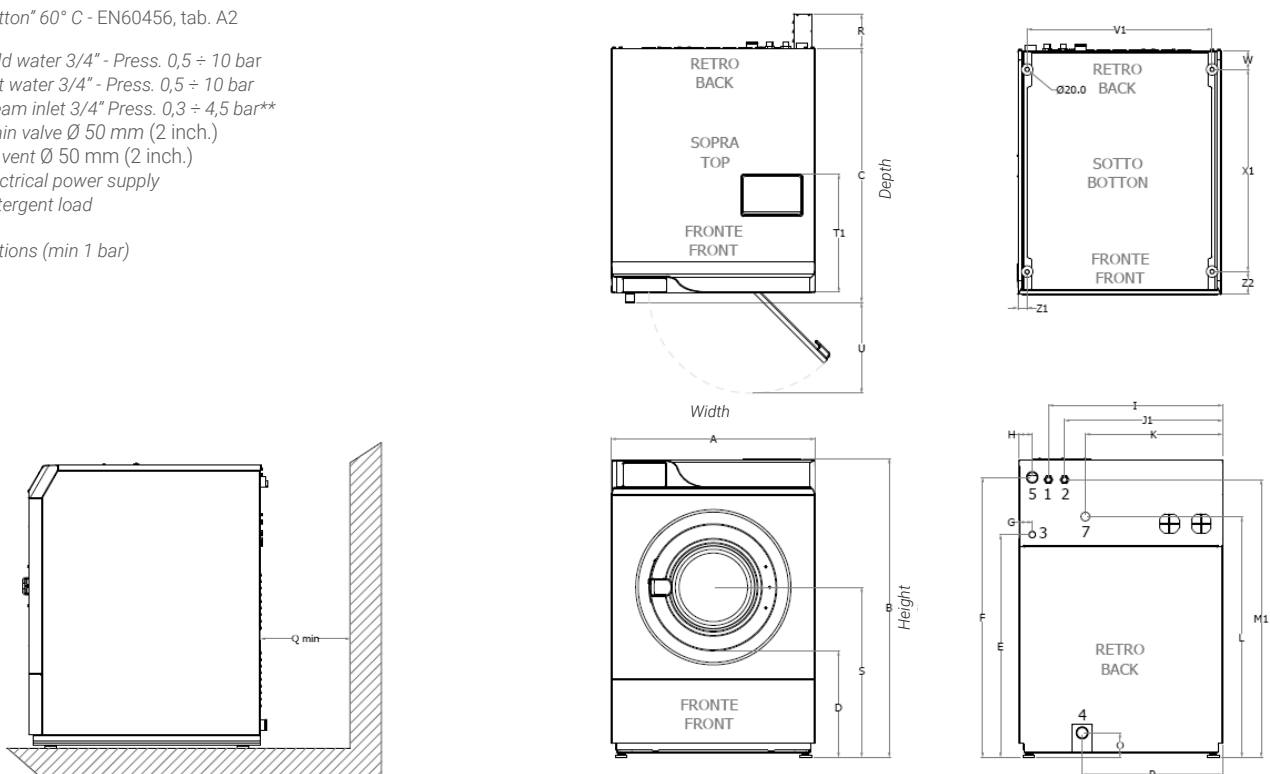

100 mm = 3.93 inch. - factor conversion 1 / 25,4

[mm]	A	B	C	D	E	F	G	H	I	J1	K	L	M1	O	P	Q	R	S	T1	U	V1	W	X1	Z1	Z2
LM 8	720	1113	821	360	791	1060	52	62	555	315	495	787	1089	103	560	600	150	582	490	421	640	26	690	40	57
LM 11	720	1113	933	360	791	1060	52	62	555	315	495	787	1089	103	560	600	150	582	490	421	640	26	795	40	57

C200102X.03 - Specification and technical data are subject to modification.